

## Polycarbonate-like 405nm



Polycarbonate-like  
405nm

Tensile Modulus (Low – High)



Accuracy (Low – High)



Colours



Black



Grey

Available

1 kg bottles



T-Rex Skull 3D File designed by MakerBot  
<https://www.thingiverse.com/thing:308335>

Photocentric's Maker Polycarbonate-like, 405nm resin is the first choice for low-cost, accurate printing. The low-irritancy and low odour make printing and post-processing safer and easier, while printed parts exhibit the precision and strength of conventional hard plastics. Photocentric's Maker Polycarbonate-like, 405nm works with a variety of UV LCD and DLP 3D printers.

### Optimised for:

- |  |   |
|--|---|
| <input type="radio"/> Accurate models      | <input type="radio"/> Fast prototyping and model making |
| <input type="radio"/> Suitable for end use | <input type="radio"/> Fastenings, tools and couplings   |

## Unique features:



Low cost



Strong



Easy and safe to use



High precision



Fast curing



Low shrinkage



Low odour



High heat resistance  
of 110°C



### Polycarbonate-like 405nm Black & Grey

| Tensile Properites                 | Green   | Post-cured             | Method                       |
|------------------------------------|---------|------------------------|------------------------------|
| Tensile Modulus *                  | 837 MPa | 2330 MPa               | ASTM D638                    |
| Ultimate Tensile Strength *        | 25 MPa  | 58 MPa                 | ASTM D638                    |
| Elongation at Break *              | 16%     | 6%                     | ASTM D638                    |
| <b>Flexural Properties</b>         |         |                        |                              |
| Flexural Strength *                | -       | 87 MPa                 | ASTM D790                    |
| Flexural Modulus *                 | -       | 2190 MPa               | ASTM D790                    |
| <b>Impact Properties</b>           |         |                        |                              |
| Impact Strength Notched Izod *     | -       | 43 J/m                 | ASTM D256                    |
| <b>General Properties</b>          |         |                        |                              |
| Shore Hardness *                   | 75D     | 87D                    | ASTM D2240                   |
| Heat Deflection Temperature*       | -       | 110°C                  | ASTM D648                    |
| Water absorption (%)* after 24 hrs | -       | 0.1%                   | Internal                     |
| Water absorption (%)* after 72 hrs | -       | 0.4%                   | Internal                     |
| Water absorption (%)* after 7 days | -       | 0.6%                   | Internal                     |
| <b>Liquid Properties</b>           |         |                        |                              |
| Viscosity                          | -       | 740 cPs                | At 25°C Brookfield spindle 3 |
| Density                            | -       | 1.10 g/cm <sup>3</sup> |                              |
| Storage Temperature                | -       | 10<T<50°C              |                              |

\* Mechanical properties stated based on fully cured material.

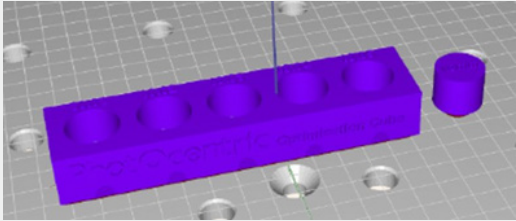
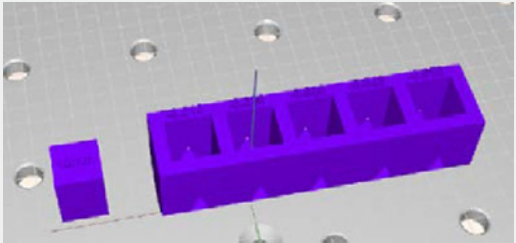


We are constantly reviewing and improving our range of high-performance materials.  
For the very latest information, please visit the Photocentric website



## Design Consideration Parameters

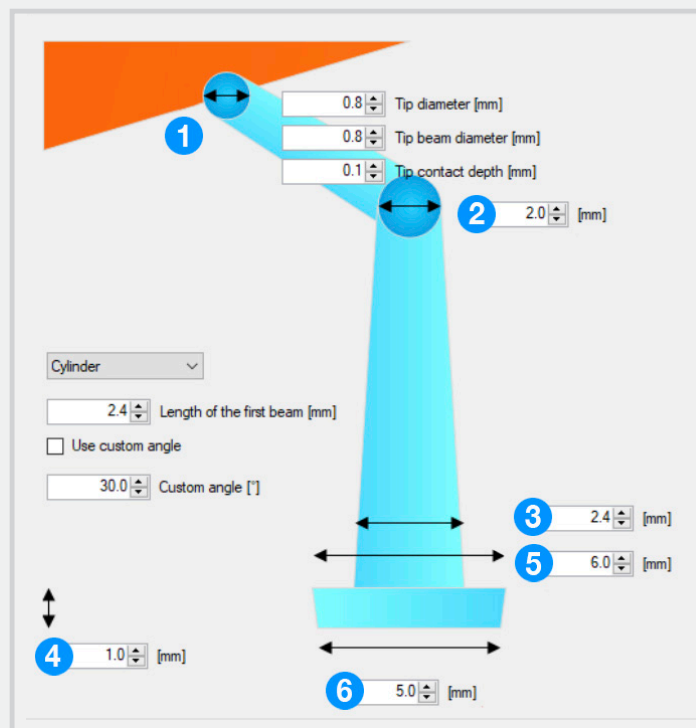
These are example parameters in relation to a UV LCD printer with 81µm XY resolution.

| Properties   | Parameters  |
|--|---|
| Minimum feature size (pins)  | 0.4mm   |
| Minimum hole diameter  | 0.7mm   |
| Minimum slot thickness   | 0.5mm   |
| Minimum wall thickness   | 0.3mm   |
| Overhangs  | Successful for overhangs $\leq 45^\circ$  |
| Round Dim Fit  | Parts fit with resistance at 1mm<br><a href="#">Click to view sample</a>                        |
|   |   |
| Square Dim Fit   | Parts fit perfectly with no resistance at 0.06mm offset<br><a href="#">Click to view sample</a> |
|  |   |
| Scaling factor   | X +0.6%   Y+0.6%   Z+0.6%   |



## Recommended Support Parameters & Orientation

These are recommended support settings in relation to a UV LCD printer with 81µm XY resolution.



### Large Models

### Small Models

| Diagram Ref. Nr | Parameters                   | Values | Parameters                   | Values |
|-----------------|------------------------------|--------|------------------------------|--------|
|                 | Density                      | 80%    | Density                      | 50%    |
| 1               | Tip Diameter (mm)            | 0.5    | Tip Diameter (mm)            | 0.5    |
|                 | Critical Build Angle         | 47°    | Critical Build Angle         | 47°    |
| 2               | Pole Diameter (mm)           | 2      | Pole Diameter (mm)           | 1.5    |
| 3               | Pole Widening Factor         | 1.5    | Pole Widening Factor         | 2      |
|                 | Model Height from Base (mm)  | 10     | Model Height from Base (mm)  | 10     |
| 4               | Height of Support Foot (mm)  | 2      | Height of Support Foot (mm)  | 2      |
| 5               | Top of Foot Diameter (mm)    | 7      | Top of Foot Diameter (mm)    | 7      |
| 6               | Bottom of Foot Diameter (mm) | 5      | Bottom of Foot Diameter (mm) | 5      |

- Recommended orientation around all axes is 45 °.



## Pre-Print Instructions

1. Heat the resin to 30°C in the bottle.
2. Shake the resin bottle for 2 minutes before pouring into the resin vat.
3. Stir resin in vat with vat cleaning tool for pigment drop out etc. before and between prints if the print is immediate and vat is not being emptied.
4. Visit [photocentricgroup.com/maker/polycarbonate-like](https://photocentricgroup.com/maker/polycarbonate-like) for print settings recommendation.



## Post-Print Instructions

To reach the full mechanical properties of the material, parts printed using 'Polycarbonate-like, 405nm Black or Grey' resin will need to be post-processed.

1. Remove the print platform from the printer and place in to the wash unit.
2. Follow resin cleaner/solvent TDS for relevant wash cycles. You can use '[Photocentric Resin Cleaner 30](#)' as the cleaning medium. For '[Photocentric Resin Cleaner 30](#)', the washing cycle is 10 minutes.
3. Make sure you do not exceed the recommended wash cycles as it may have an adverse effect on the mechanical properties.
4. Rinse parts with warm water for 1-2 minutes.
5. Where possible, use compressed air to dry the parts, if not, leave them to dry naturally.
6. The printed parts can be cured in any UV post-curing unit.
7. Parts printed with 'Polycarbonate-like, 405nm- Black or Grey' are suitable for thermal shocking. To remove parts from the platform, remove from the cure unit and submerge immediately in cold water. The parts will become easily free. Repeat if necessary.
8. Alternatively, remove the platform from the cure unit and place on to a suitable flat surface. use a scraper or suitable cutters and take care to not damage the part(s) when removing them from the platform.