

Product Highlights



360º Platform Rotation

Adjustable speed to access all surfaces



Multi-Directional Adjustable Spray Nozzles

Ensure efficent cleaning of complex and delicate parts



Internal Light and Inspection Window & Wipers

Interactive user interface and ergonomic design



Smart Fluid Management

For water and resin cleaner flow



Push Fit and Easy Clip Platform

Easy transfer between printer and wash and cure units








For further information

Key Features

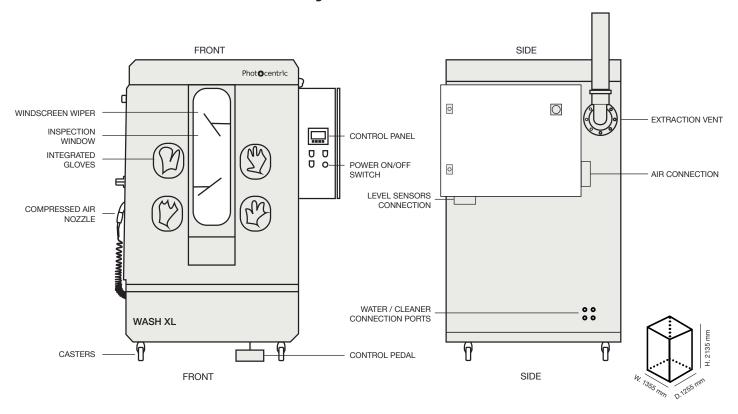

Full Technical Specifications

Construction Performance Input Requirements Active volume dimensions: 900 x 900 x External dimensions (W X D X H): 1355 x Average power consumption: 5kW 1350mm (35.4 x 35.4 x 53.1") 1255 x 2135 mm (53.35 x 49.41 x 84.06") Power input: Single phase 230V 32A Maximum part weight: 35 kg (77lbs) Weight: 500kg (1100lbs) Plug type: 3 pin IEC60309 Recommended operating temperature: Continous feed of town/mains required 10°C to 40°C (50°F to 104°F) Resin Cleaner 30 (IBC) required for washing Compatible with: Daylight and UV Empty IBC required for waste fluid Cleaning method: Manual Spray

Accessories	Warranty	Part of the LC Titan Comprehensive Ecosystem.
 Hoses and connectors 2 Custom IBC caps with level sensor Power cable 	Warranty period of 12 months as standard	Designed to work seamlessly with LC Titan, our comprehensive ecosystem enables you to further enhance your printing experience Use in combination with Cure XL for seamless postprocessing Wide range of affordable functional resins Service plan options avaliable Expert design support service





